

(CS1W/CS2W) (Instruction on install/replace batteries)

A. There are two locations to install batteries, on the back of the console and inside the plastic cover of driving belt:

1. Steps for install / changing batteries on console: Loosen the screws on the back of console and remove the cover of battery compartment → install / replace new batteries.
2. Steps for install / changing batteries inside the cover of driving belt:
   (a) Remove the plastic ring of the driving belt that on the left side of user.
   (b) Loosen and remove the screws on the plastic cover.
   (c) Adjust the crank by the cycling direction to the position that the plastic cover could be removed and change the batteries.

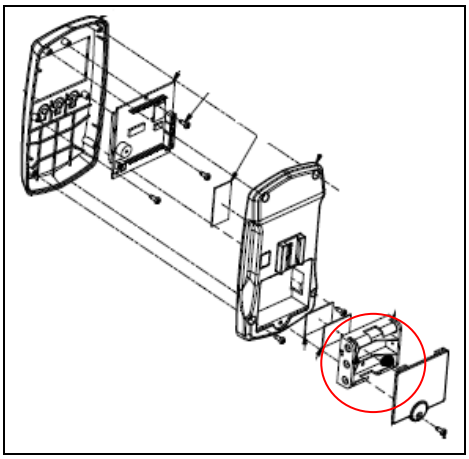

(Pic 1 - console)

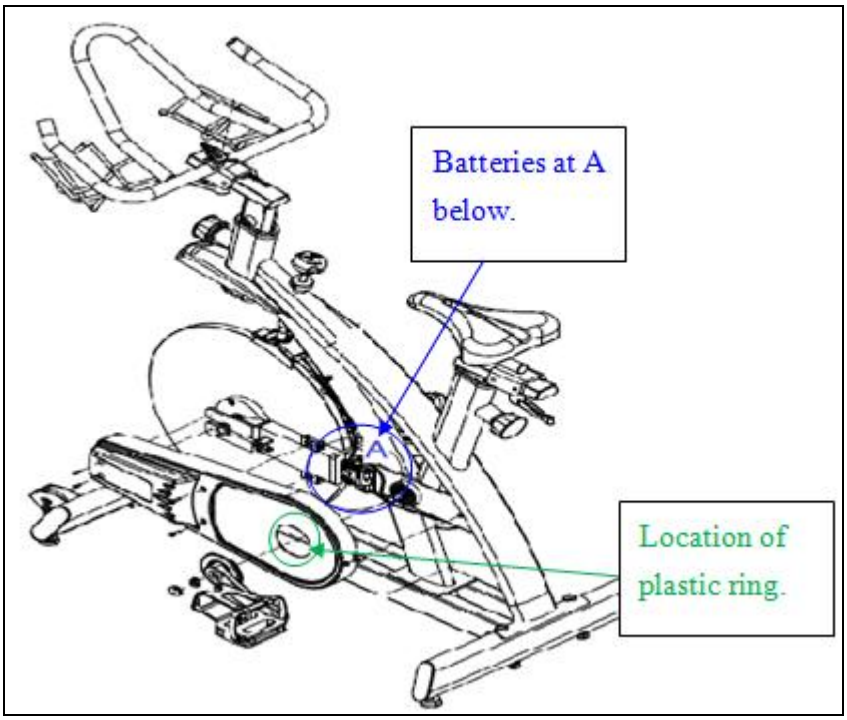

(Pic 2. Driving board)