*PLSC Maintenance



* Customers can put some grease on pivot points(red circle place), with brass or gunmetal bushings.







* Let's maintain your machine!

PLSC.5 PARTS


A.1 [1PCS]

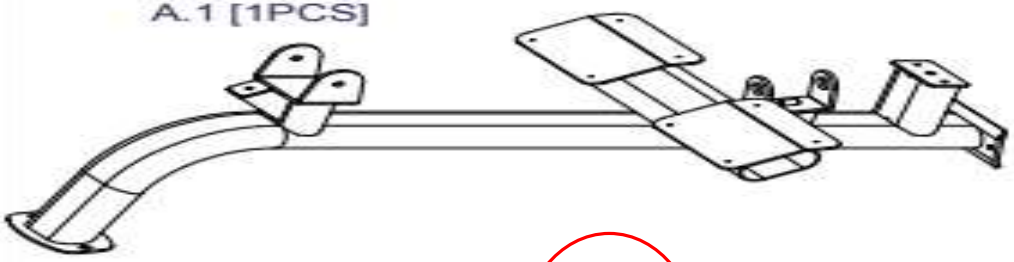


C.1[1PCS]




B.1 [1PCS]

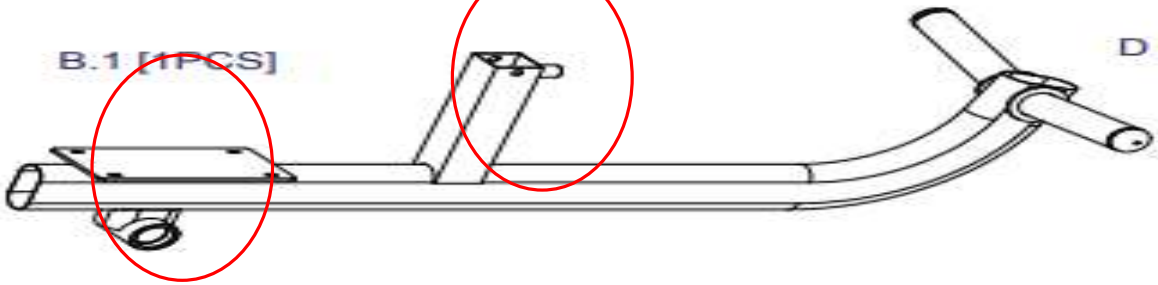


D [1PCS]




E [1PCS]

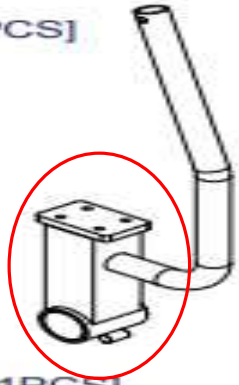


F [1PCS]

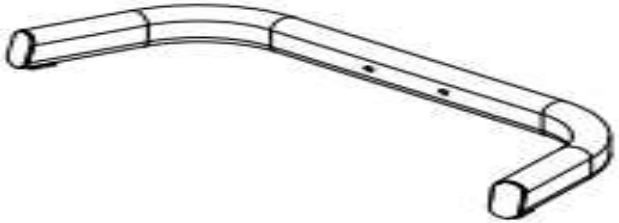

G[1PCS]



M[1PCS]
9121-078

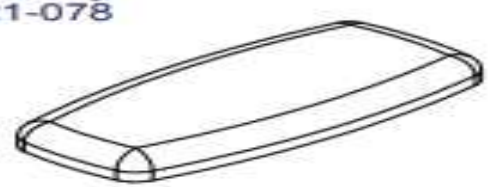

N [2PCS]
9131-038




J [1PCS]
8323-236




PLSC.5 PARTS


D1.Rubber Pedestal (9310-119) pre-installed	[1PCS]
D2. 50X100 End Cap (9211-193)	[4PCS]
D3. Block Rubber (9310-077)	[1PCS]
D4. Rubber Insert (9310-076)	[1PCS]
D5. Cap Sleeve (9212-026)	[6PCS]
D7. Rubber Dount (9310-016)	[2PCS]
D8. Pinch Cock (OC-06)	[2PCS]
D9. Nylon Bushing (9211-047)	[1PCS]
D11.FULLEY SPACER (8120-082) pre-installed	[2PCS]
D12. Shaft (8220-201)	[1PCS]
D13. 1/2"X38L Pop Pin (8250-065G) pre-installed	[1PCS]
D14. Shaft (8220-200)	[1PCS]
D15.Rubber stop (9310-018) pre-installed	[1PCS]
D16. Bearing (8510-020) pre-installed	[2PCS]
D17. End Closure (8130-253) pre-installed	[3PCS]
D18. Impregnated With Handle (9162-120) pre-installed	[2PCS]
D19. Oilite Bushing (8520-005) pre-installed	[2PCS]
D20. Oilte Bushing (8520-004) pre-installed	[2PCS]
D22. Impregnated With Handle (9162-163) pre-installed	[1PCS]
D23. Chrome Collar(8890-061) pre-installed	[3PCS]
D24. End Closrer (8130-131)	[2PCS]

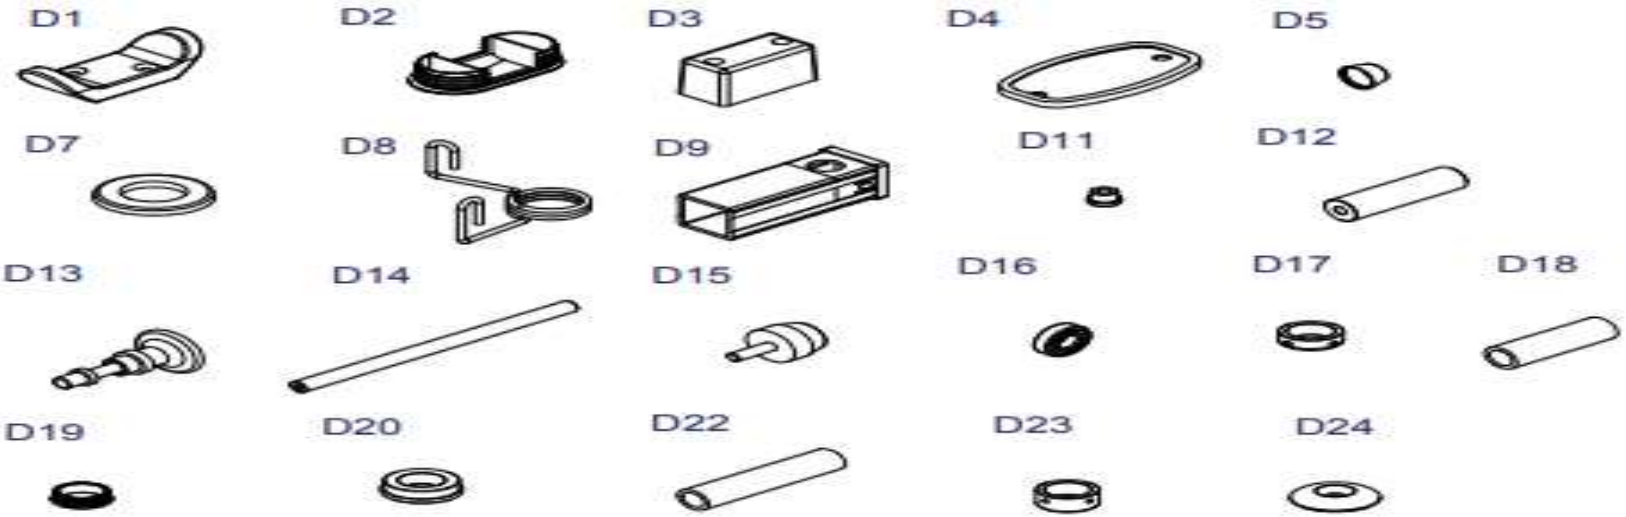


Above shows STEP 1
assembled and completed

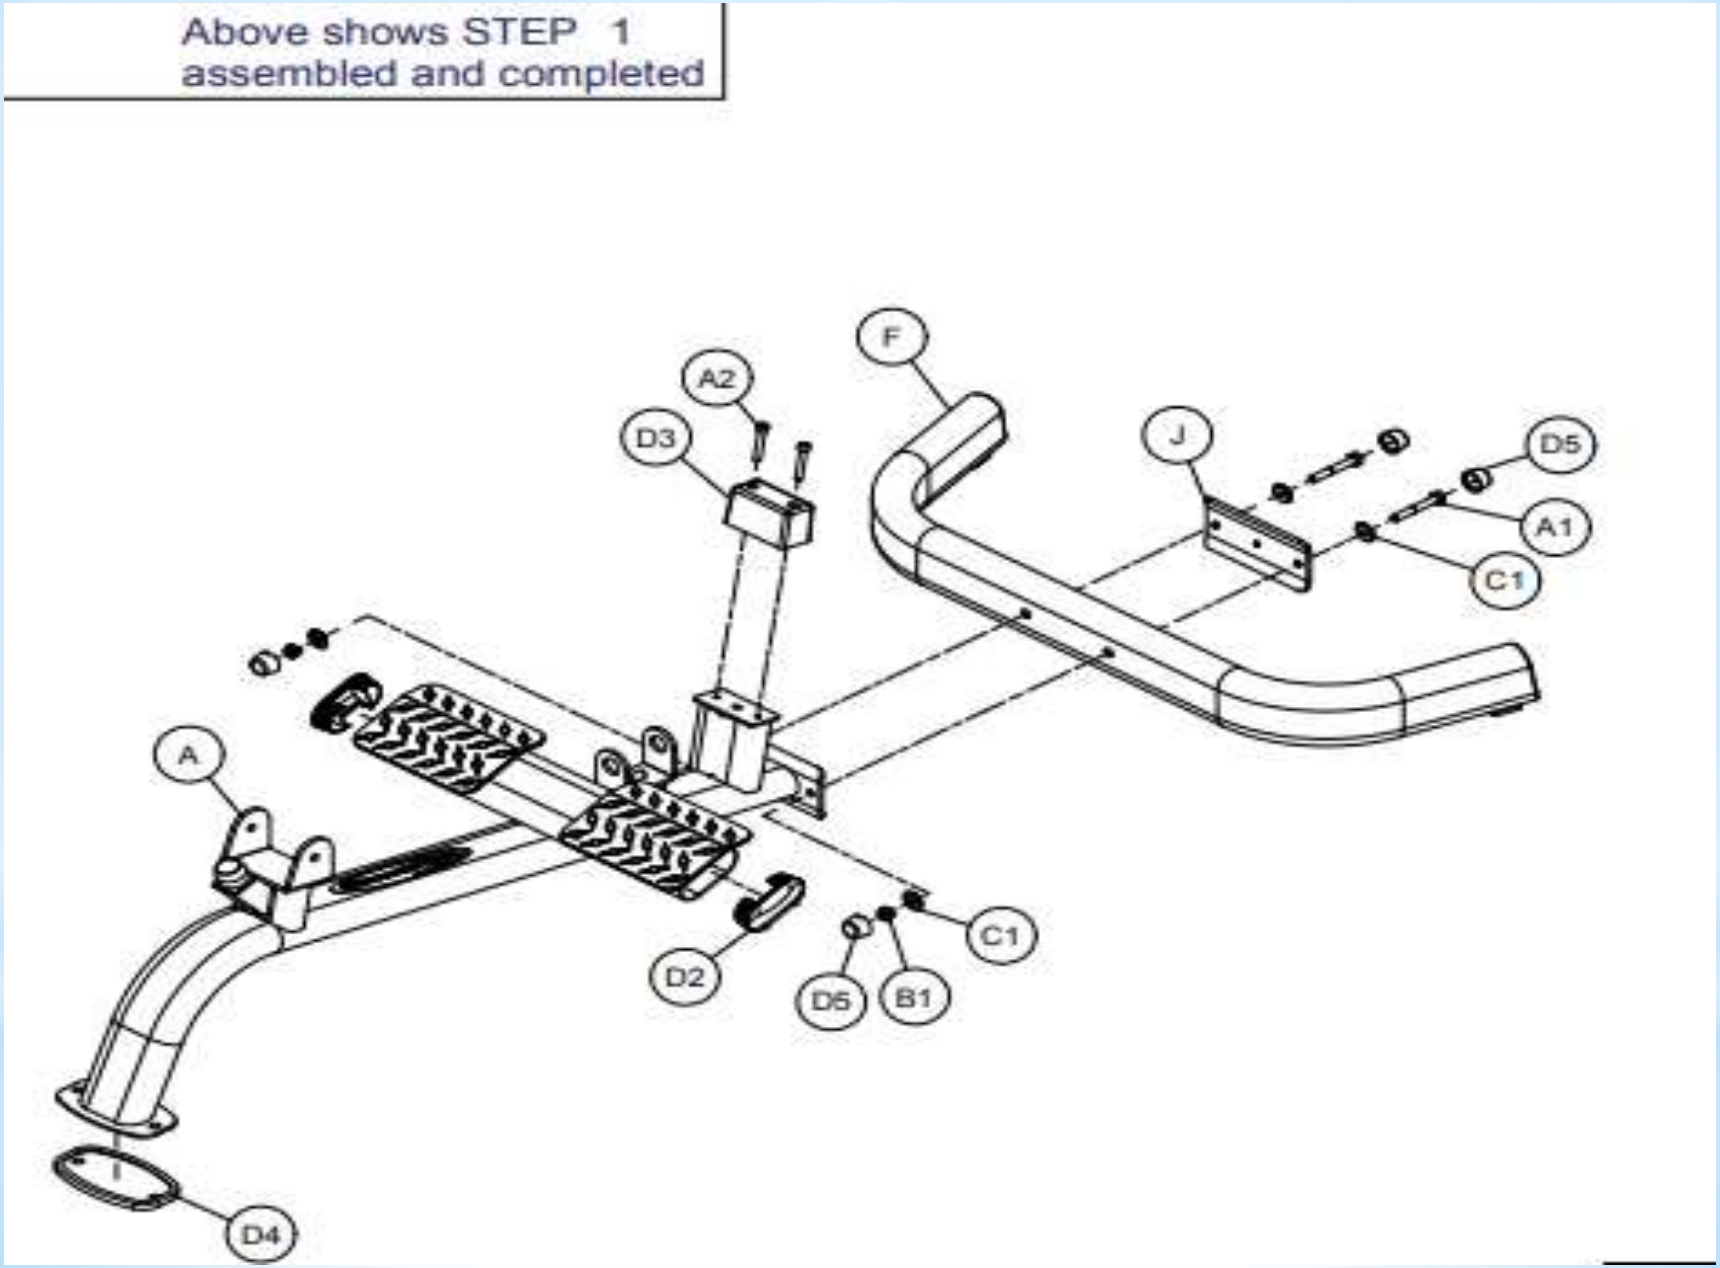


Above shows STEP 2
assembled and completed

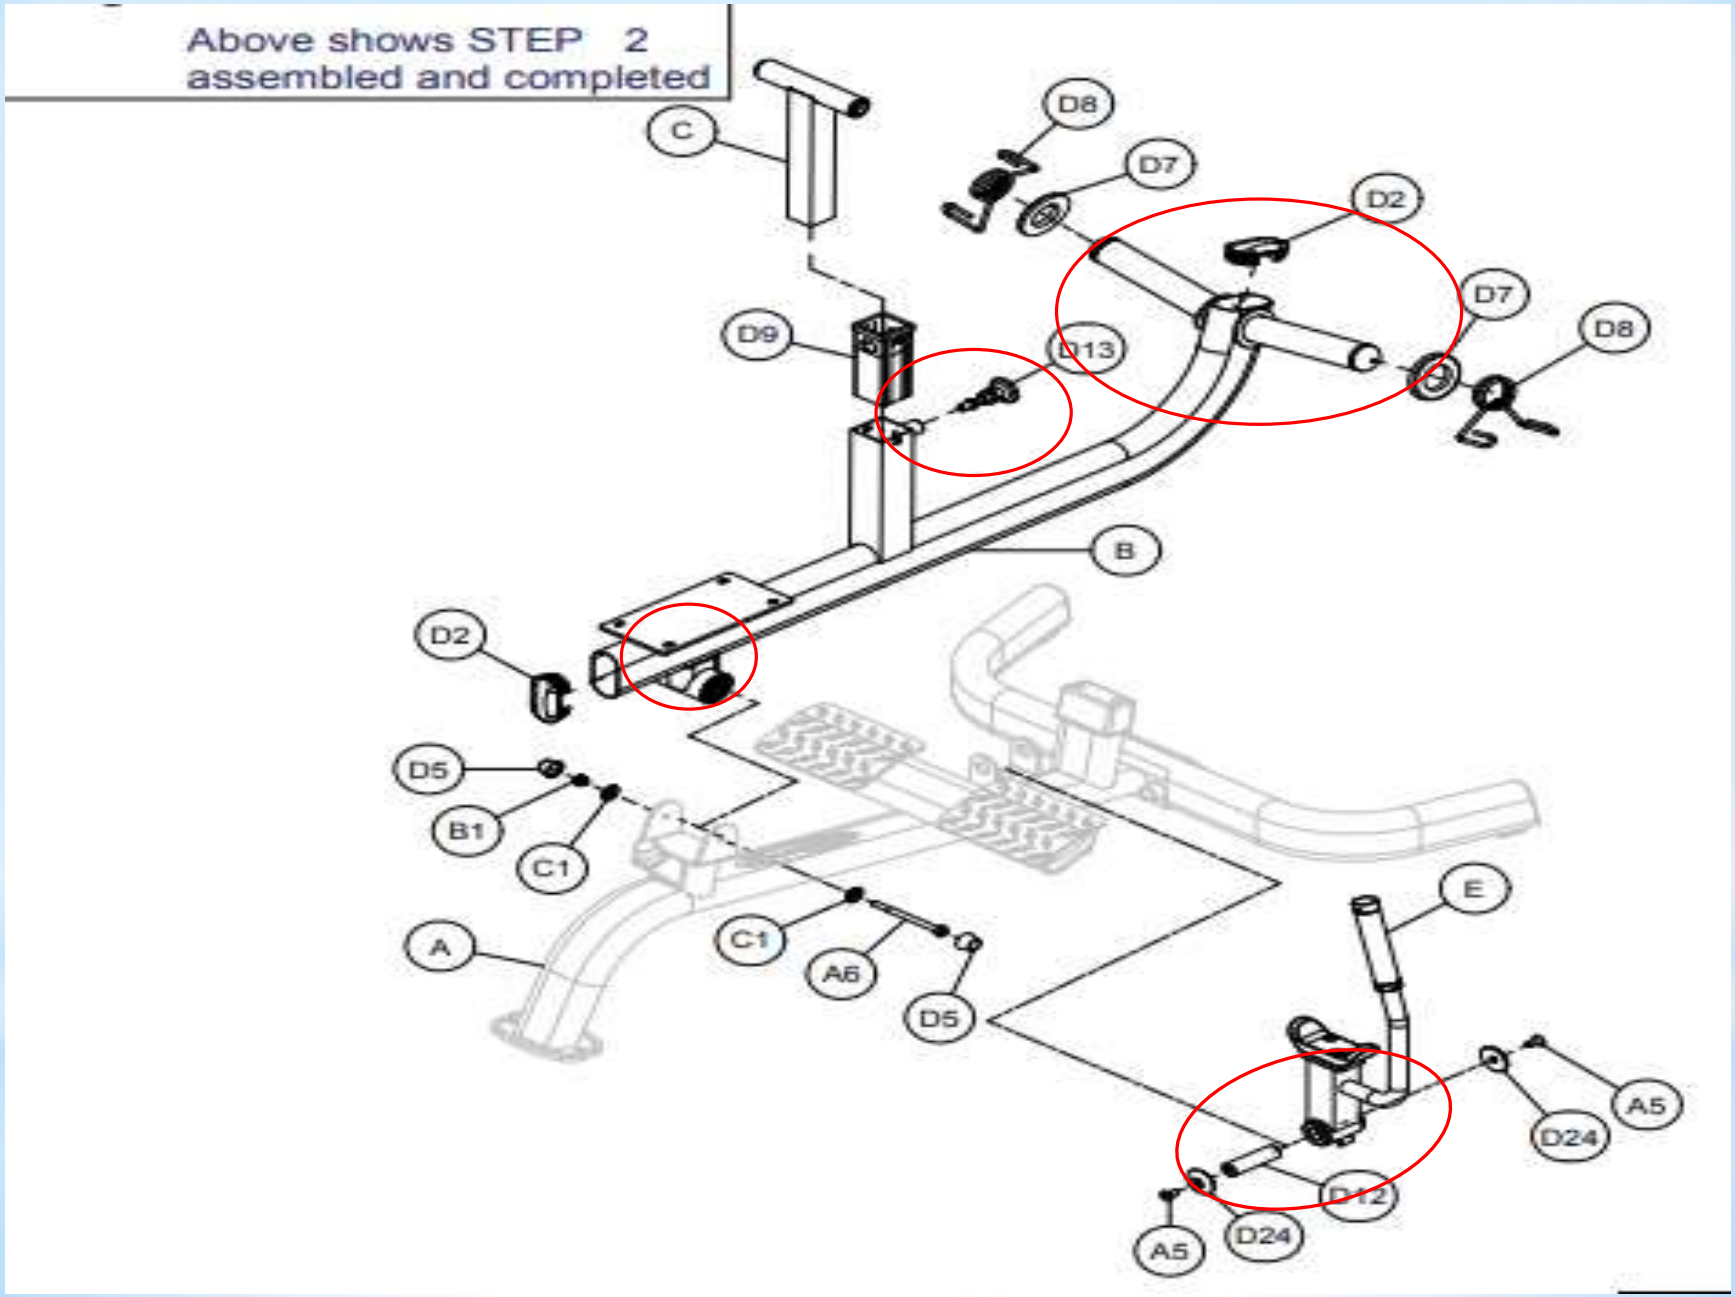

Above shows STEP 3
assembled and completed

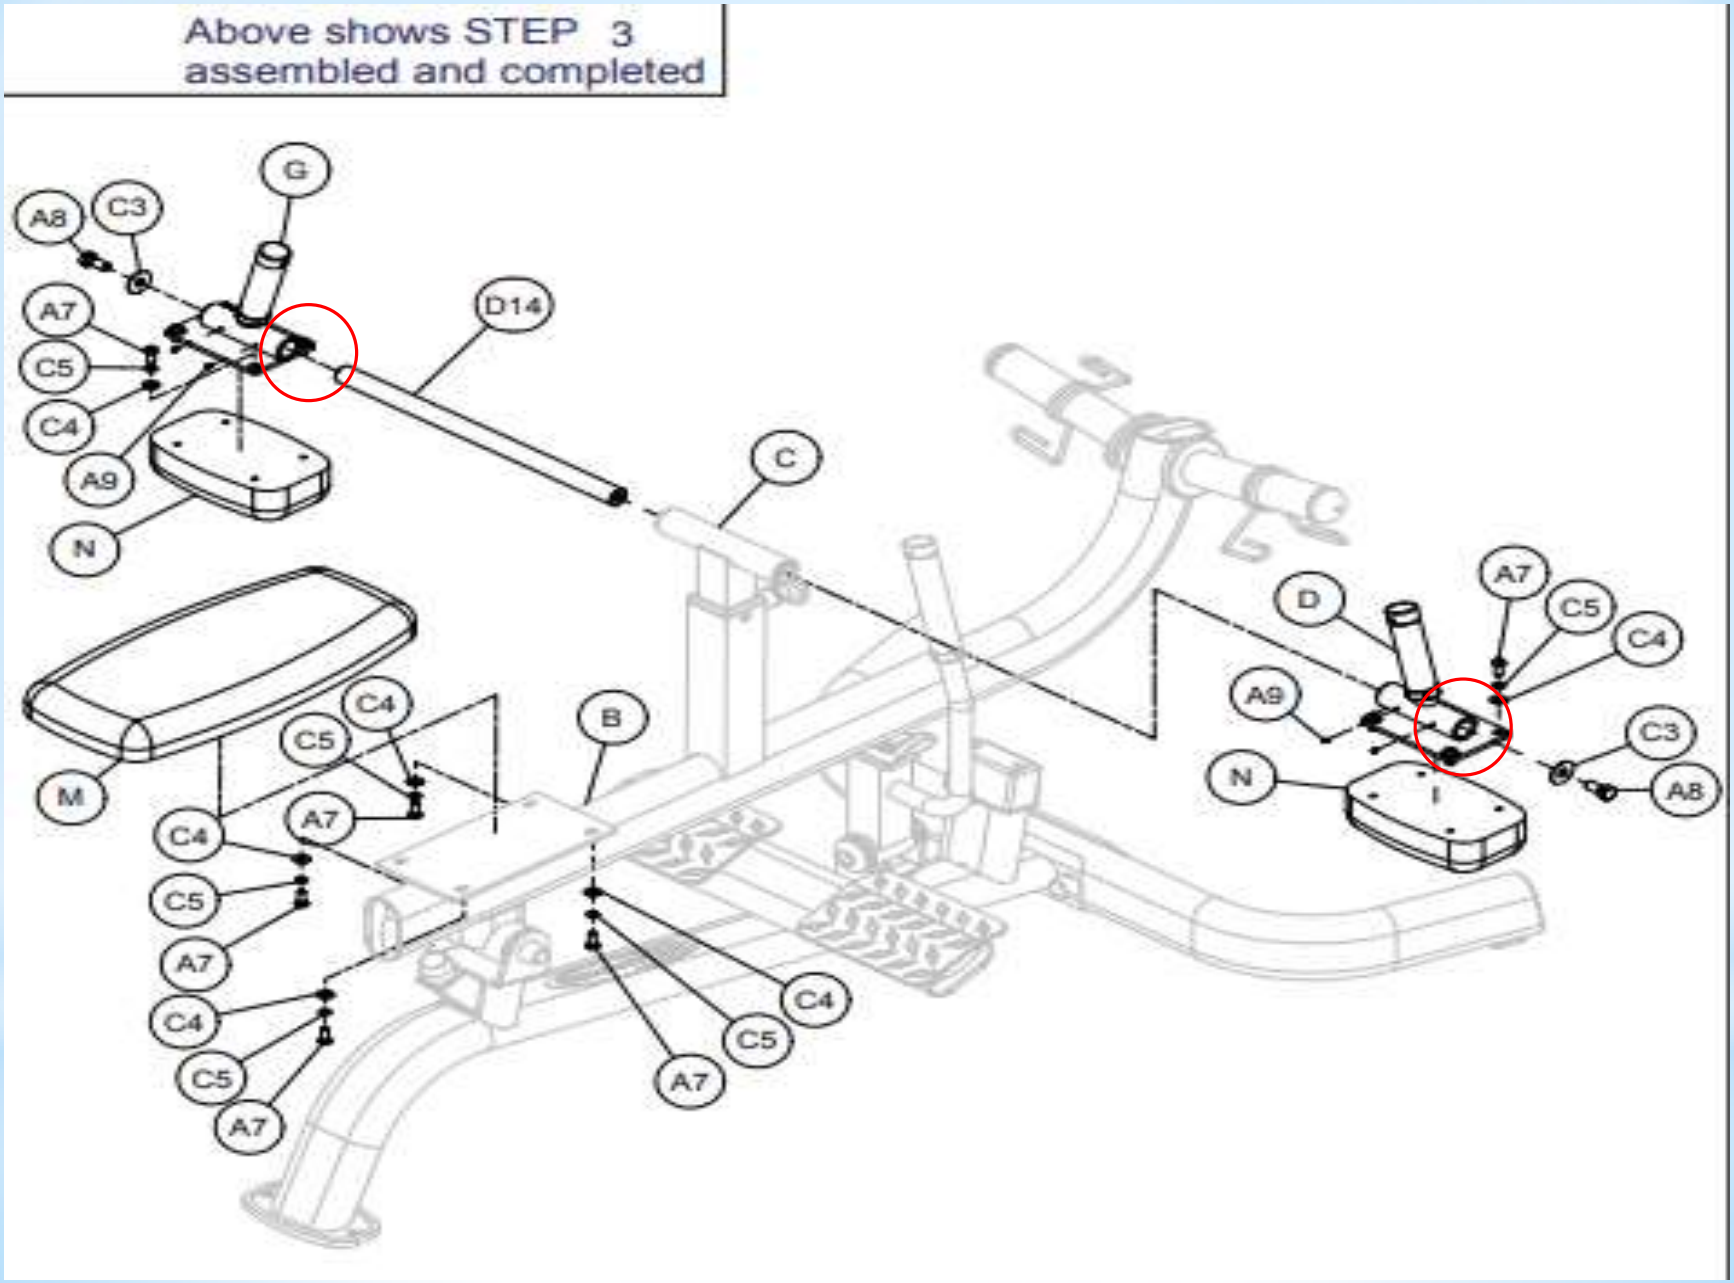

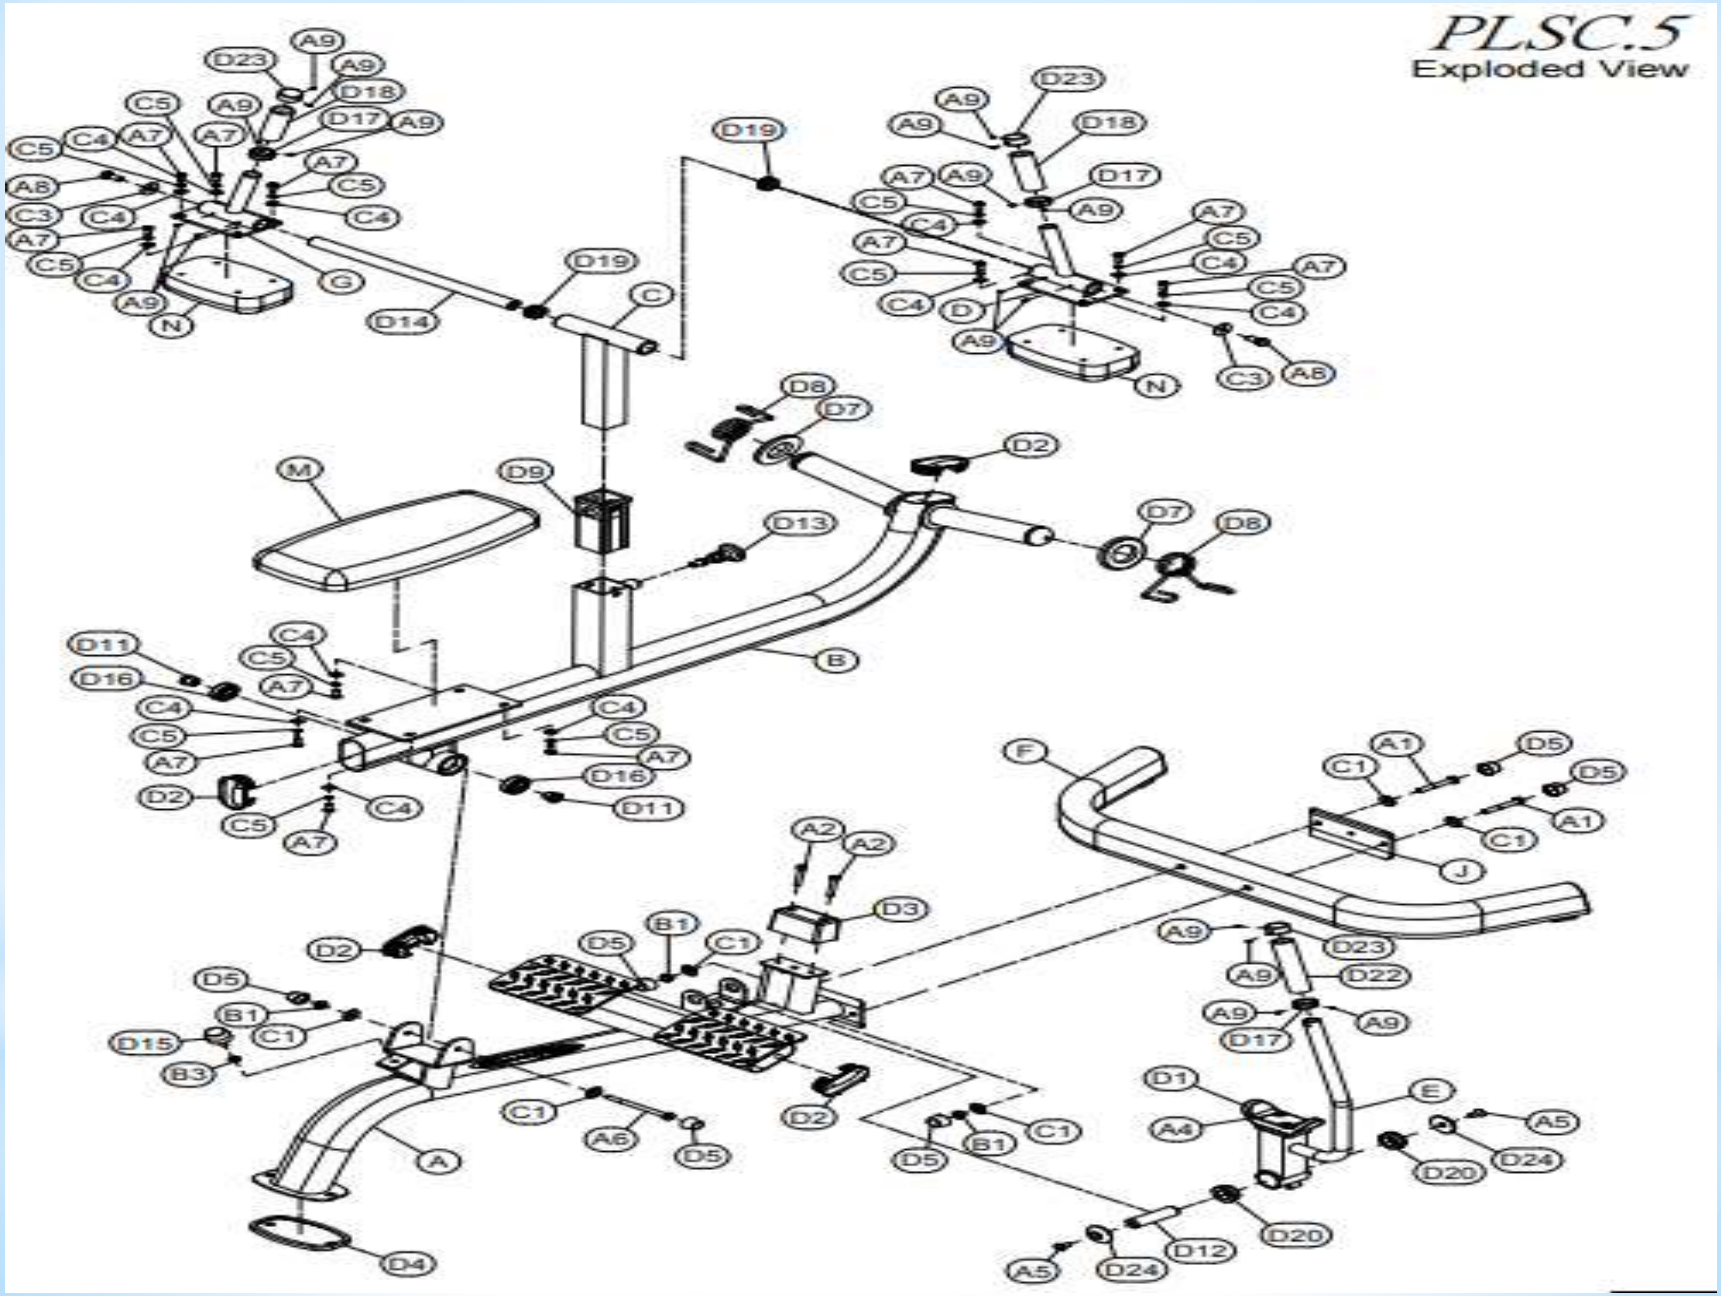
PLSC.5
Exploded View

*Well done!

